



- LTE Cat M1/NB2 with 2G Fallback
- Rapid & Covert Installation
- 7 Years Standby Time
- OTA Control
- Scheduled Timing Report
- Geo-fences
- Waterproof
- Vibration Feedback
- Low Power Alarm
- Wakeup Report
- Motion Detection
- Automatic Mode Switching
- Temperature Monitoring
- Ambient Light Monitoring
- Tamper Detection
- Magnetic mounting (Optional)
- Use with Animal Collars

GL530MG


LTE Cat M1/NB2 waterproof GNSS tracker with up to 7 years standby time

	140g (4.94oz) 160g (5.64oz) (magnetic case mounting version)		87 × 51 × 30mm 3.43''(L) × 2.01''(W) × 1.18''(H) 87 × 51 × 33.5mm 3.43''(L) × 2.01''(W) × 1.32''(H) (magnetic case mounting version)
	-20°C ~ +60°C		3 CR123A lithium batteries, 1400 mAh

*Standby Time:

1 Report/ Day (GNSS on)		5 years
1 Report/ Day (Cell ID Only)		7 years

The vv is the upgraded LTE Cat M1/NB2 version of GL500MG. It integrates the latest low-power wide area network standards and covers a broader area, making it more flexible to deploy. It is an easy-to-deploy asset tracker built on Queclink's innovative power management technology. It lasts for up to seven years and features one of the longest battery lives among devices of its size in the market. The built-in light sensors make the product sensitive to tamper attempts and its waterproof design allows it to be used in harsh environments. With internal temperature and light sensors, the product is ideal for a wide range of environmental monitoring applications such as cold chain logistics, warehouse management, cargo trucking, high-value static asset monitoring and more. The GL530MG supports several mounting alternatives which use unique clip on design to securely attach the device to any asset.

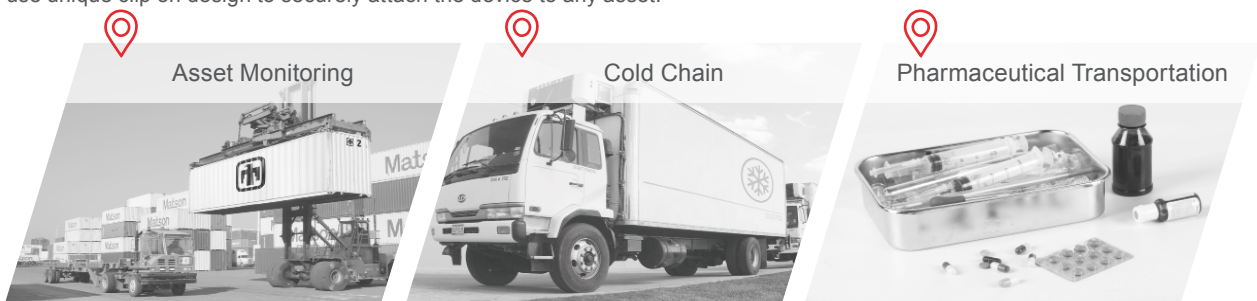

GL530MG

Region	Operating Band	GNSS Type	Position Accuracy (CEP)	Certificate
Worldwide	Cat M1/Cat NB2: Cat M1: B1/B2/B3/B4/B5/B8/B12/B13/B18/ B19/B20/B25/B27/B28/B66/B85 Cat NB2: B1/B2/B3/B4/B5/B8/B12/B13/B18/ B19/B20/B25/B28/B66/B71/B85 EGPRS: 850/900/1800/1900 MHz	u-blox All-in-One GNSS receiver	Autonomous: < 2m	CE, FCC, PTCRB

Appearance



Interfaces

Power Button	Used for power on/off and working status checking
LTE Antenna	Internal only
GNSS Antenna	Internal only
LED Indicators	GNSS, Status

Air Interface Protocol

Command Set	@Track protocol command
Transmit Protocol	TCP, UDP, SMS
Working Modes	Power saving mode for long standby time Continuous mode for emergency tracking
Scheduled Timing Report	Report position and status at preset time intervals
Geo-fences	Support up to 20 internal geo-fence regions
Low Power Alarm	Alarm when internal battery is low
Wakeup Report	Report when the device wakes up
Motion Detection	Motion detection based on internal 3-axis accelerometer
Reporting Frequency Adjustment	Intelligent adjustment of reporting frequency


*Note:
 1. The standby time is estimated under the condition of operating with LTE CAT M1/NB-IoT and the CSQ is greater than 15, working at a constant ambient temperature of 25°C and reporting once a day without any sensors.
 2. The battery life estimation is based on LTE CAT M1/NB-IoT Connectivity and may be influenced by several factors such as network coverage, report sent interval, ambient temperature, sensors' setting, peripherals, installation location and orientation, etc. If you're interested in power consumption calculation of our device, please contact with our sales or FAE to get more information.

Accessories



GL500M Magnetic Mounting Bracket

Used to install GL500 series products on metal surface for convenient taking off



GL500M Mounting Bracket

Used to hold GL500 series products on plastic bracket which is installed on surfaces where screw holes can be drilled



USB Cable 0.5M

It is used for firmware upgrade of GL53MG, GV57MG and GL530MG



UART Cable 0.5M

It is used for configuration of GL53MG, GV57MG and GL530MG